

SUPER SEAL **FLEX INJECT**[™]

STOPS LEAKS PERMANENTLY

FASTEST - EASIEST - PROVEN

DiversiTech[®] introduces Super Seal Flex Inject[™], a NEW refrigerant leak sealant solution that will save both Contractors and Home Owners time and money!



3X SEALING POWER

Patent pending Flex Inject triple power sealant is the fastest, most effective proven way to permanently seal and prevent air conditioning and refrigeration (AC/R) leaks



NO TOOLS REQUIRED

Flex Inject installs in seconds - no tools or gauges required. The Flex Inject sealant goes to work immediately traveling through the system with both the oil and refrigerant stopping leaks dead in their tracks.



COMPATIBLE WITH ALL OILS & REFRIGERANTS

Works with all compressors, heat pumps, condensers, recovery units, and other system components. Will not plug up manifold gauges, TXVs, pistons or cap tubes. Compatible with all oils and refrigerants including R410A requiring no pump down or recovery.



POLYMER FREE

The polymer free formula has unique metal bonding properties that create a permanent protective barrier to keep the refrigerant from escaping and is microchannel friendly.




PN# 985
Patent Pending

ALL SYSTEMS | UP TO 20KW

UP TO 6 TONS

Super Seal Flex Inject™

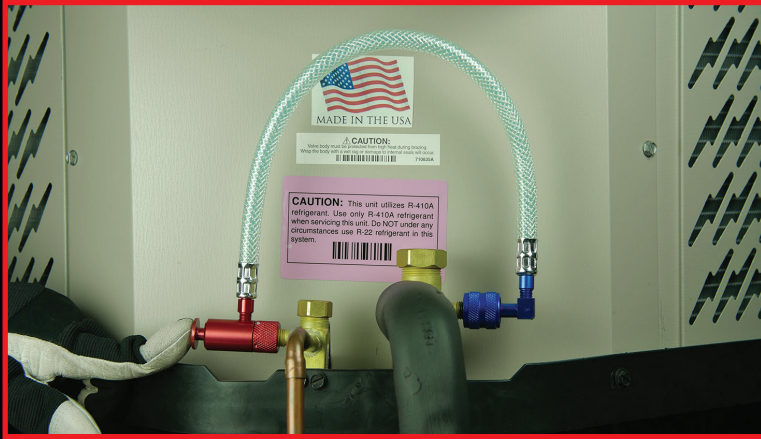

**No manifold gauge
or hoses needed
Just Connect HI & LO -
PUSH TO GO!**

QUICK & EASY INSTALLATION: INSTALL INTO FULLY-CHARGED SYSTEM

1. Make sure system is running.
2. Connect the red push button valve to the high side service port.*
3. Connect the blue low loss fitting to the low side service port.
4. Remove puck and press red button for 3 to 5 seconds to inject sealant.
5. Once sealant is dispensed, disconnect red push button valve from system.
6. Remove blue low loss fitting from system.

NO SYSTEM RUN TIME REQUIRED AFTER INJECTION

*IF NO HIGHSIDE PORT IS AVAILABLE - ATTACH RED PUSH BUTTON VALVE TO A REFRIGERANT CYLINDER & FOLLOW STEPS 3-6.

WHY SUPER SEAL FLEX INJECT IS THE OBVIOUS CHOICE

Feature	DiversiTech Super Seal Flex Inject™	Nu-Calgon EasySeal Direct Inject
Sealant Power	Triple	Single
Hose	Flexible	Rigid
Equipment Required	None	Manifold Gauge and Hoses
Sealant-Refrigerant Integration	No Run Time Required	60 Minutes with System Running
Valve Protection	Push Button Valve Allows for a Controlled Refrigerant Flow with Automatic Shut Off	One Way Check Valve
Compressor Protection	Misting Orifice Prevents Liquid Slugging	None

REFRIGERANT LEAK SEALANT SOLUTION PART NUMBER CONVERSION TABLE

DiversiTech		Nu-Calgon	
PRODUCT	PART NO.	PRODUCT	PART NO.
Cliplight Super Seal Flex Inject™ with Integrated Hose - Up to 6 tons	985	EasySeal Direct Inject SS - Up to 1.5 tons	4050-05
		EasySeal Direct Inject SS - Up to 1.5 tons (6 pc. Bulk)	4050-07
		EasySeal Direct Inject SS - Up to 1.5 tons	4050-08