


Ball knob Series

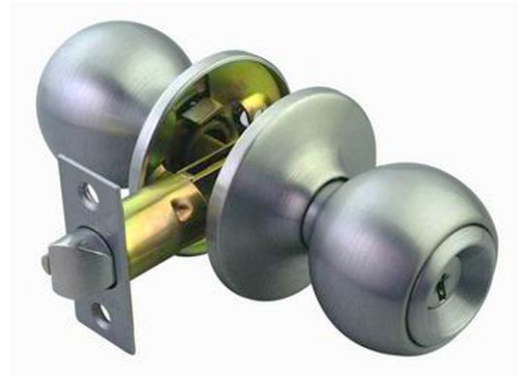

Features & Options

- Door Thickness** – Fit 1-3/8" to 1-3/4" standard door thickness
- Door Preparation** – Cross Bore: 2-1/8", Edge: 1"
- Latch Backset** – Adjustable 2-3/8" – 2-3/4"
- Latch** – 2-way
- Standard Latch Faceplate** – 1" x 2-1/4" Radius
- Spindle Type** – Crescent
- Bolt** – 1/2" throw
- Cylinder** – Zinc alloy cylinder KW1 keyway 5-pin
- Standard Strike Plate** – 2-1/4" x 1-3/4" round corner full
- Material** – Zinc, Steel and Brass
- ANSI/BHMA** – A156.2 Grade 3

Functions

Entry – (F109)

Both lever locked or unlocked by key outside or turn-piece inside

Privacy – (F76)

Both levers locked or unlocked by turn-piece inside. Outside lever unlocked by coin or screwdriver

Passage – (F75)

Latchbolt operated by lever from either side at all times

Dummy


Pull one/both side, no mechanical operation

Part

Description

- | | |
|-------|--|
| 55016 | Passage Lockset Ball Knob Satin Nickel US15 |
| 55017 | Privacy Lockset Ball Knob Satin Nickel US15 |
| 55018 | Entry Lockset Ball Knob Satin Nickel US15 KD/KW1 |
| 55019 | Dummy Lockset Ball Knob Satin Nickel US15 |

Finishes



Warranty

- Five Year Limited Warranty

